




Leman Instruments

FID STATION 50RC : HIGH PURITY HYDROGEN & ZERO AIR GENERATORS WITH ON BOARD COMPRESSOR

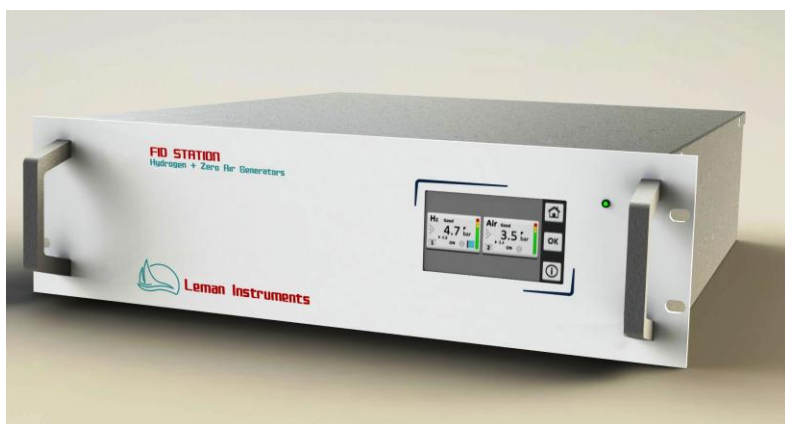

H₂ + AIR

APPLICATION

- ✓ Combustion gases for FID

DESCRIPTION

LEMAN-INSTRUMENTS designed the **FID STATION 50RC** product line of **High Purity Hydrogen & Zero Air generators with compressor** to supply independently all gases necessary to FID detector, close to the consumer in elegant 19" casing with full color display and touchpad.

The FID Station is composed of a High purity Hydrogen generator, an Ultra Zero Air generator with on board AIR compressor:

Based on the field proven Solid Polymer Electrolyte (PEM) cell technology, pure Hydrogen is produced at low pressure from electricity and high quality distilled water. It is available 24/7 with constant purity >99.999%. Output pressure is regulated electronically and could be set from 0.5 to 7 bar. This process can be started on demand and does not require any caustic solution. Based on the Pressure Swing Adsorption (PSA) technology, compressed Air is first dried and filtered from pollutant gases; and then passes throughout an hot catalytic chamber to remove HC, CO and CH₄. Output pressure is regulated from 0.5 to 5 bar.

Each instrument is equipped with high performance communication interfaces USB and Ethernet(Opt) to create a very flexible gas network with local or central control.

Due to the software being focused on safety, automatic regulation and intuitive and up to date communications, the **FIDSTATION 50RC** is easy to install, reliable, safe and pleasant to operate.

BENEFITS

- ✓ Reduces in operation costs. Return on investment within 15 months.
- ✓ Improves resolution and detection limit versus Helium only usage. Provides High pressure stability.
- ✓ H₂ and Zero Air available 24/7 at constant purity. No contamination.
- ✓ Independent source of Hydrogen and Zero Air that does not require any piping and can be easily moved around the laboratory. Remote control from PC, I-phone and I-pad
- ✓ Low noise compressor < 55dB(A)).
- ✓ Very safe operation, internal leak-test, automatic shut-down, over-pressure valve, current and voltage limits.
- ✓ No handling and storage of cumbersome gas cylinders. No cylinder rental fee.
- ✓ Extended autonomy with 5L water tank.
- ✓ Long life compressor with power economy function.

FID STATION 50RC

SPECIFICATIONS

Models	FIDSTATION50RC-100/1000; FIDSTATION50RC-160/2000; FIDSTATION50RC-250/3000
Outflow capacities @ 1013/20°C	FIDSTATION50RC-100/1000 : 100 Nml/ min H2 & 1000 Nml/min AIR FIDSTATION50RC-160/2000 : 160 Nml/ min H2 & 2000 Nml/min AIR FIDSTATION50RC-250/3000 : 250 Nml/ min H2 & 3000 Nml/min AIR
H2 purity	>99.999% (maximum HC content: 0.05ppm)
AIR purity	< 0.05 ppm HCnm ; < 0.05 ppm CO and CH4
Dew point H2 and Air	< -40°C
Outlet Pressures	H2 : from 0.5 to 7 bar (7 to 100 psig), adjustable by software. AIR: from 0.5 to 5 bar (7 to 70 psig), adjustable by software.
Water quality	High purity distilled+filtered water. TOC free. (Peus-Instruments ZEROWATER)
Water capacity	5L external tank. Generates about 6000L Hydrogen
Compressed Air	Supplied by internal compressor
Safety	Low H2 stored volume; over pressure valve; internal leak test; automatic shut down; maximum current limit, water quality, over temperature.
Sound pressure	< 55 dB(A), measured at 1m
Manual control	Through a 4.3" TFT-LCD color display with touchpad, located on the front panel. Display of major parameters, functioning status and alarms. Intuitive navigation to functions by menus and sub menus.
Remote control, Communications	<ul style="list-style-type: none">■ Through 2 potential free relay contacts (I/O)■ USB. RS485 (Mod-Bus) or Display..■ Trough Ethernet 10/100 network (option)■ Log book download by USB.
Outlet fittings	Stainless steel 1/8" OD compression
Power supply	Automatic switching from 90VAC to 260VAC, 47 to 63 Hz
Power consumption (max at full flow)	FIDSTATION50RC-100/1000 : maximum 550W FIDSTATION50RC-160/2000 : maximum 600W FIDSTATION50RC-250/3000 : maximum 650W
Dimensions	W=483mm/19ins, H=132mm/5.2ins (3U), D=520mm/21ins
Net weight	FIDSTATION50RC-100/1000 to FIDSTATION50RC-250/3000 : 29 Kg
Certification	CE

ORDERING NUMBERS

Model	Article #
FIDSTATION50RC-100/500	722210
FIDSTATION50RC-100/1000	722211
RS485 Interface (Option)	722281

Model	Article #
FIDSTATION50RC-160/2000	722212
FIDSTATION50RC-250/3000	722213
ZERO WATER 12x5L refill	711092
LAN Interface option	722282

LEMAN - INSTRUMENTS SAS

Archamps Technopole, 219 rue Laszlo Biro
F – 74160 ARCHAMPS

order@leman-instruments.com

Telephone: +33 4 50 39 49 22

www.leman-instruments.com